



DIMENSIONS	尺 寸
MAGNET	磁性材質
NOMINAL IMPEDANCE	阻 值
POWER RATING	設 定 值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重 量

APPLICATIONS

- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Moderns
- Communication Equipments

適用範圍

- 掌上型遊樂器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備


OBO-36008G-01

Outer Diameter 36mm
Baffle Opening 32.9mm
Materials: Rare Earth
Size: 12.5ø × 1.5mm
8Ω ± 15% at 800Hz
Normal 100mW / Max. 200mW
500Hz ± 150Hz
77 ± 3dB / 100mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
320~8,000Hz Average SPL-10dB
5% Maximum at 500Hz. 100mW
-25°C to +50°C
-25°C to +55°C
5.0gms

OBO-36025G-01

Outer Diameter 36mm
Baffle Opening 32.9mm
Materials: NdFeB
Size: 12.5ø × 1.5mm
25Ω ± 15% at 1000Hz
Normal 200mW / Max. 300mW
550Hz ± 150Hz
80 ± 3dB / 200mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
350~7,000Hz Average SPL-10dB
5% Maximum at 1200Hz. 200mW
-25°C to +50°C
-25°C to +55°C
5.6gms

Dimensions
(Unit: ±0.3mm)
輪廓尺寸圖

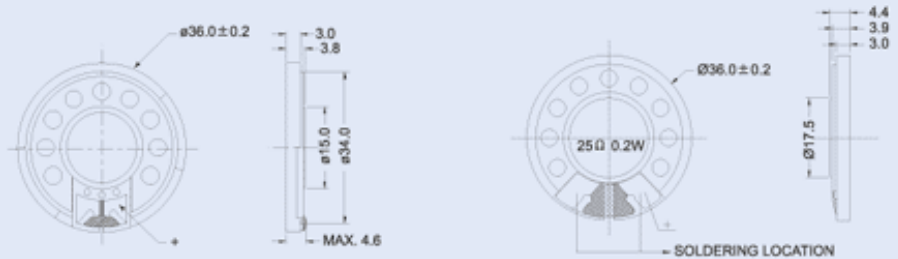

HOUSING MATERIAL: ABS

Frequency Response Curve
(Distance: 0.5m)
頻率響應圖

