

4

3

2

1

REV	ZONE	DESCRIPTION	ECN NO.	ENG	APPROVED	DATE

F

F

E

E

D

D

C


C

B

B

A

A

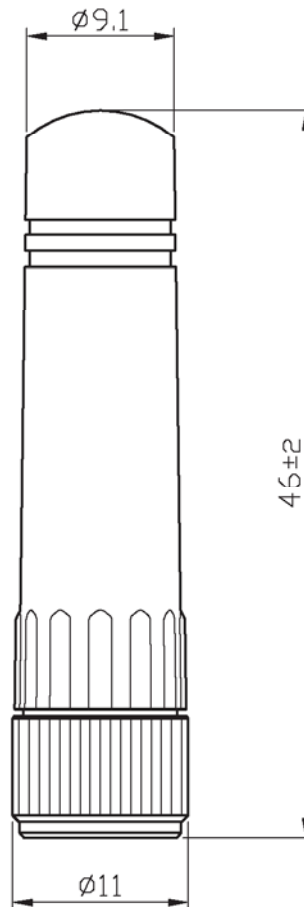

Reverse SMA Plug

Electrical Properties	
Frequency Range	900~940 MHz
Impedance	50 Ω
V.S.W.R.	≤2.0@Resonate Frequency
Radiation	Omni
Peak Gain	Unity
Polarization	Vertical
Mechanical Properties	
Whip	PU/TPE
Connector	Brass
Weight	7 g(est)
Operating Temp	-20°C +65°C

Frequency Range	900~940 MHz
Impedance	50 Ω
V.S.W.R.	≤2.0@Resonate Frequency
Radiation	Omni
Peak Gain	Unity
Polarization	Vertical
Mechanical Properties	
Whip	PU/TPE
Connector	Brass
Weight	7 g(est)
Operating Temp	-20°C +65°C

UNLESS OTHERWISE SPECIFIED
TOLERANCES ON:
X ± 1
X.X ± 0.5
X.XX ± 0.25
ANG. ± 2.0°

DRAWN BY: PENNY

DESIGNED BY: 溫祥能

CHECKED BY: 廖信寬

APPROVED BY: 吳蕙萁

MATERIAL:

FINISH:

SCALE: 2/1 ; UNIT: mm

DATE: 2009/11/10

REV: 00

TITLE : #328X Replacement Antenna

DRAW NO. :

PART NO. : MEGHX-328XRSXX-920

MAP electronics co., ltd.
Material All Procurement

4

3

2

1