


MATERIAL:

NO	DESCRIPTION	MATERIAL	SUPPLIER	REMARK
1	CABLE	UL 20276(32AWG*1P+E+A+M)*2+#34*1P+A)+#28*2C+ MB 92% JACKET:PVC OD:4.0mm WHITE	GM/GLAN	*
2	CONNECTOR	USB 3.01"C" TYPE PLUG REV USB 3.0	YALIAN	*
3	CONNECTOR	USB 3.0 A TYPE FEMALE PIN G/F SEHLL NICKEL PLATE	YALIAN	*
4	PVC	PVC SHORE 88±2 COLOR:WHITE	GM	*
5	PE	PE CLEAR	USIFE	41-001-034
6	BOOT	USB "A" TYPE BOOT ABS MOLD WHITE	GM	44-001-686

NOTES:

- 1 100% OPEN&SHORT TEST
- 2 ALL MATERIALS IS RoHS COMPLIANCE

PIN ASSIGNMENTS

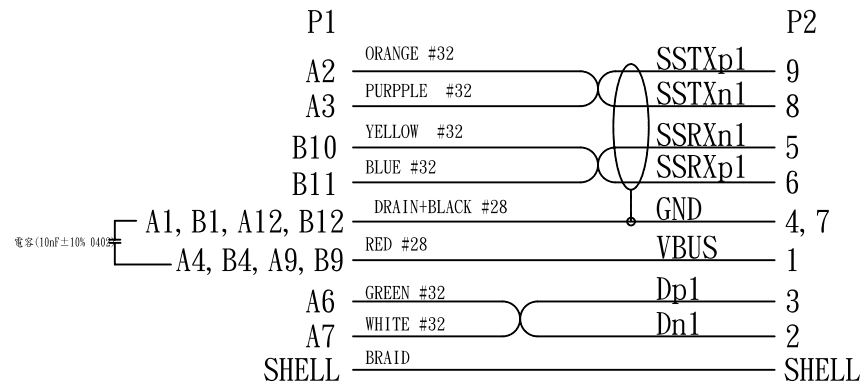

TOLERANCES		REVISIONS			COMPONENT NO :	MAPelectronics co., ltd. Material All Procurement		
		REV	DESCRIPTION	DATE	APPVD.	TITLE : CABLE ASS'Y		
X .	+	mm				REQUIRED DOCUMENTS : *		
X . X	-	mm	0 SAMPLE (MEUSB57008 REV. 0)	JUNE-22-15	LI	SCALE : / SHEET : 1 / 1 REV. 0		
X . XX	+	mm				DRAWN:Libo DRAWING : MEUSB57008		
X . XXX	-	mm				DATE:JUNE-22-15 FILE:F:\SAMPLE\BJA57008.DWG		
METRIC (mm)						THIRD ANGLE PROJECTION		