


TABLE 1


NO	LENGTH	TOLERANCE
1	500	±15
2	1000	±25
3	1500	±30
4	2000	±35
5	3000	±50

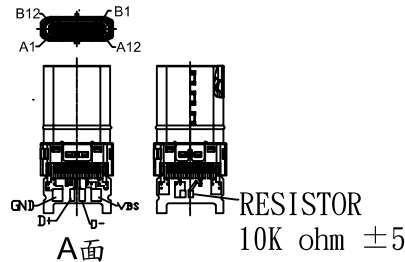

MATERIAL:

NO	DESCRIPTION	MATERIAL	SUPPLIER	REMARK
1	CABLE	UL/CSA 2725 28AWG*1P+28AWG*2C+AEB 65% JACKET:PVC OD:3.5mm BLACK	GM	12-7046D01-07A
2	CONNECTOR	USB 3.1 "C" TYPE PLUG REV USB 2.0	SYNCONN	*
3	CONNECTOR	MICRO USB B TYPE 5 PIN FEMALE G/F SHELL NICKEL PLATED	YALIAN	22-001-006-04
4	PE	PE CLEAR	USIFE	41-001-034
5	PVC	PVC SHORE 88±2 COLOR:BLACK	GM	41-001-006
6	H. S. TUBE	HEAT SHRINK TUBE UL/CSA 1.0mm BLACK	WORE	42-A001001

PIN ASSIGNMENTS

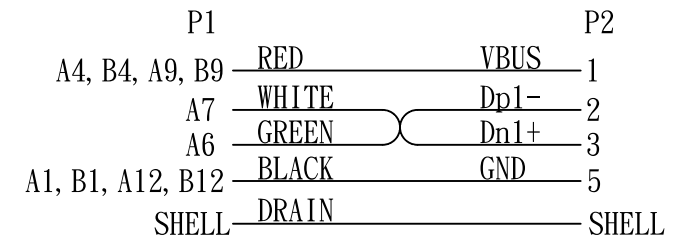

NOTES:

1. 100%OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.
3. MOLD NO:HS-II04I/0

TOLERANCES		REVISIONS			COMPONENT NO :				
		REV	DESCRIPTION	DATE	APPVD.				USB 2.0 MICRO B F TO C
X . +	mm	0	SAMPLE(MEUSB57012 REV. 0)	JULY-13-15	LI	APPROVED :	TITLE : CABLE ASS'Y		
X . X +	mm					CHECKED :	REQUIRED DOCUMENTS : *		
X . XX +	mm						SCALE : /	SHEET : 1 / 1	REV. 0
X . XXX +	mm					DRAWN:Libo	DRAWING : MEUSB57012		
METRIC (mm)						DATE:JULY-13-15	FILE:F:\SAMPLE\BJA57012.DWG		