




| | |
|-----------------------|--------|
| SENSITIVITY | 感 度 |
| SENSITIVITY REDUCTION | 感度遞減 |
| FREQUENCY | 頻 率 |
| MAX. WORKING VOLTAGE | 最大工作電壓 |
| CURRENT CONSUMPTION | 電流消耗 |
| S/N RATIO | 信 噪 比 |
| STORAGE TEMPERATURE | 儲存溫度 |
| WEIGHT | 重 量 |


Schematic Diagram 測定電路圖

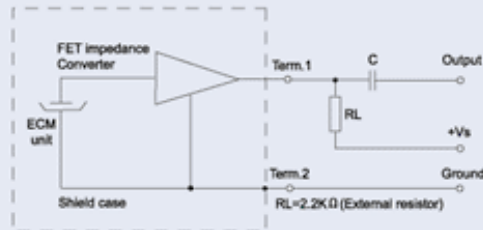

Dimensions (Unit: mm±0.2) 尺 寸 圖



Typical Frequency Response Curve 頻率響應圖

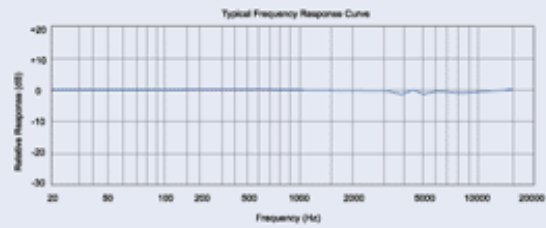

FEATURES

特色

- Omnidirectional type 全指向性
- Ultra thin 超薄
- For GSM, PDA...Dual Band applications 適用於GSM、PDA、雙頻機...等

OBO-62SN-0B

OBO-62KA-0B

OBO-62EC-0B

Vs=2.0V, RL=2.2KΩ

-38±3dB -40±3dB -42±3dB -44±3dB

F=1KHz 0dB=1V/Pa Within

-3dB at 1.5V compare to 3.0V

50~16,000Hz

Max. 10V

Max. 0.5mA

More than 60dB

-25°C to +70°C

Max. 1.0gm