



DIMENSIONS	尺 寸
NOMINAL IMPEDANCE	阻 值
POWER RATING	設 定 值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重 量

Dimensions
(Unit: ±0.3mm)
軸距尺寸圖

Frequency Response Curve
(Distance: 0.5m)
頻率響應圖

APPLICATIONS



- Headphones & Earphones
- Hands-Free Cellular Phones
- Communication Equipments

適用範圍

- 耳機耳塞
- 手機免持耳機
- 通訊設備


OBO-15008F-02

15.0mm×3.5mm
8Ω ± 15% at 1kHz / 1.0V
Norm. 200mW / Max. 300mW
1,000Hz±20%
85 ± 3dB / 200mW / 10cm
Average at 1.0, 1.2, 1.5, 2.0KHz
600~6,000Hz
Max. 5% at 1,400Hz, 200mW
-20°C to +50°C
-20°C to +55°C
0.8 ± 0.2 gm

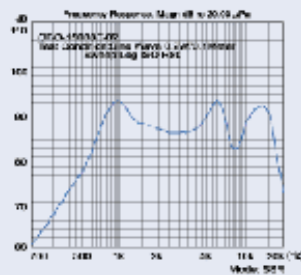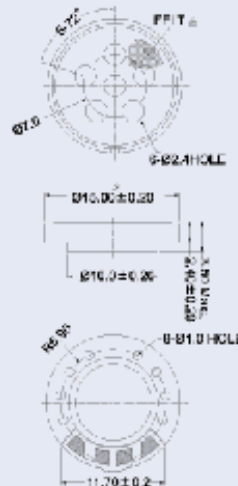

OBO-15032F-02

15.0mm×4.2mm
32Ω ± 15% at 1,000Hz / 0.98V
Normal 30mW / Max. 50mW
680Hz±150Hz
100 ± 3dB / 30mW / IEC-318
Average at 1.0, 1.2, 1.5, 2.0KHz
680~20,000Hz Average SPL-10dB
5% Maximum at 1,600Hz, 30mW
-25°C to +50°C
-25°C to +55°C
1.7gms

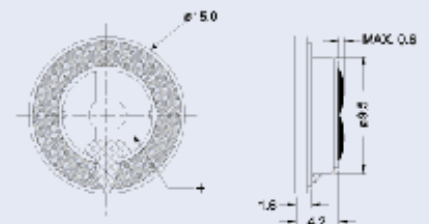

HOUSING MATERIAL: METAL

