



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions
(Unit: ±0.3mm)
軸尺尺寸圖

Frequency Response Curve
(Distance: 0.5m)
頻率響應曲線

APPLICATIONS


- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

適用範圍

- 掌上型遊戲器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備

OBO-20032F-01


20mm X 3.0mm
32Ω ± 15% at 1,400Hz
Normal 200mW / Max. 300mW
650Hz ± 150Hz
76 ± 3dB / 200mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
400-6,500Hz Average SPL-10dB
5% Maximum at 1,200Hz, 200mW
-25°C to +50°C
-25°C to +55°C
2.3gms



HOUSING MATERIAL: METAL

OBO-20032G-01

20.0mm X 4.4mm
32Ω ± 15% at 1,000Hz / 1.0v
Normal 100mW / Max. 200mW
700Hz ± 150Hz
74 ± 3dB / 100mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
550-5,000 Hz Average SPL-10dB
5% Maximum at 1,000Hz, 100mW
-25°C to +50°C
-25°C to +55°C
1.7gms

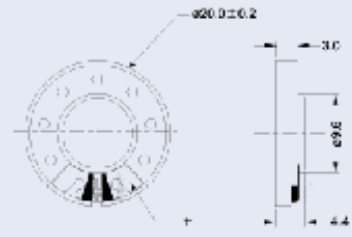

HOUSING MATERIAL: ABS

