



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions
(Unit: ±0.3mm)
稱量尺寸圖

Frequency Response Curve
(Distance: 0.5m)
頻率響應圖

APPLICATIONS

- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

適用範圍


- 掌上型遊戲器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備

OBO-28008F-01


28.0mm×2.2mm
8Ω±20% at 1,200Hz
Normal 200mW / Max. 500mW
650Hz±150Hz
81±3dB / 200mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
350~8,500Hz Average SPL-10dB
5% Maximum at 1,200Hz, 200mW
-25°C to +50°C
-25°C to +55°C
6.0gms

OBO-28008G-01

28.0mm×3.0mm
8Ω±15% at 700Hz
Normal 100mW / Max. 200mW
500Hz±150Hz
78±3dB / 100mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0 KHz
350~8,000Hz Average SPL-10dB
5% Maximum at 800Hz, 100mW
-25°C to +50°C
-25°C to +55°C
2.9gms

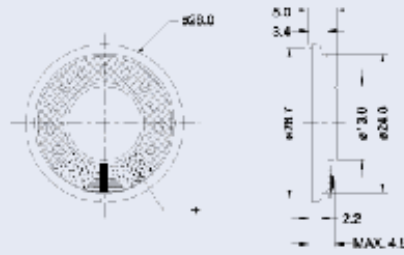

HOUSING MATERIAL : METAL



HOUSING MATERIAL : ABS

