

DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出聲壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions  
(Unit: ±0.3mm)  
繪圖尺寸圖

Frequency Response Curve  
(Distance: 0.5m)  
頻率響應圖

## APPLICATIONS

- Notebook PC
- Electric Dictionary
- LCD Monitor
- Multimedia Device

## 適用範圍


- 筆記型PC
- 電子字典
- LCD液晶顯示器
- 多媒體設備

### OBO-35004K-01

16.0mm×5.0mm
4Ω±15% at 1,100Hz
Normal 1.0W / Max. 2.0W
600Hz±150Hz
81±3dB / 1.0W / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
F0~20,000Hz Average SPL-10dB
5% Maximum at 1,000Hz, 1.0W
-25°C to +60°C
-25°C to +55°C
2.6gms

### OBO-35008K-01

16.0mm×5.0mm
8Ω±15% at 1,200Hz
Normal 1.0W / Max. 2.0W
600Hz±150Hz
81±3dB / 1.0W / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
450~20,000Hz Average SPL-10dB
5% Maximum at 1,000Hz, 1.0W
-25°C to +50°C
-25°C to +55°C
2.8gms

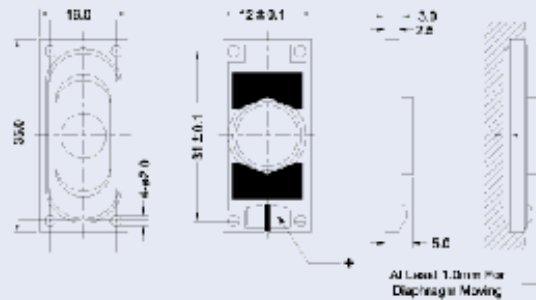

HOUSING MATERIAL: ABS

