

# SBU80 SERIES

## 80W Open Frame Switching Power Supplies For I.T.E.

### Description:


The SBU80 series of compact, open frame constructed, AC/DC switching mode power supplies provide 80 Watts of continuous output power. They are suited for use in disc drive systems, microprocess or based systems, portable equipments and many other applications. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1),TUV/Bauart(EN 60950-1) and new CE requirements. All units are 100% burned in and tested.

### Features:

- Wide Input Voltage 90 to 264 VAC,47 to 63 Hz
- Internal EMI filter
- Dual and Triple Output
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal
- Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal
- Output Voltage Available From 3.3VDC Thru 24VDC
- Input Surge Current, Over Voltage and Over Load protection
- Over Voltage Protection (Crowbar Design)
- Power Factor Correction
- Size: 3"x5"x1.18"
- Class I Insulation
- 2 year warranty



### Safety Approvals :



### Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Input Voltage	Operating Voltage	90		264	VAC
Fin	Input Frequency		47		63	Hz
PFC	Power Factor Correction	Io=Full load, Vin=90~260VAC	0.95	0.97	1.0	
Wo	Output Power Range	Vin=90 to 264 VAC	0		80	W
Vo	Output Voltage Range		See rating Chart			V
Io	Output Current Range		See rating Chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			2.0	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			1.0	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		12	15	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		26	30	A
Eff	Efficiency	Io=Full load, Vin=230VAC	70	80	85	%
REG-i	Line Regulation	Io=Full load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		5	7	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Transient Response	Io=Full load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full load, Vin=110VAC	16			mS
Ts	Start Up Time	Io=Full load, Vin=100VAC	0.3	1	2	S
* Vp-p	Ripple & Noise (Peak to Peak)	Full load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full load, Vin=240VAC		0.4	0.75	mA
Tc	Temperature Coefficient	All output	-0.04		0.04	%/°C

\* Note: The Ripple & Noise which is under 3.3VDC at 2% max

### Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0		70	°C
Tstg	Storage Temperature		-40		85	°C
Hr	Relative Humidity		5		95	%
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

# SBU80 SERIES

## 80W Open Frame Switching Power Supplies For I.T.E.


### Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ri	Isolation Resistance	Test Voltage=500VDC	50			M Ω
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

### Output Voltage And Current Rating Chart ( Multi Output ) :

Model Number	Output#1				Output#2				Output#3				Maximum Output Power
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	
SBU80-200	+3.3V	1.2A	12A	7%	+12V	0.5A	5A	5%					80W
SBU80-201	+5V	1.2A	12A	5%	+12V	0.5A	5A	5%					80W
SBU80-202	+5V	1.2A	12A	5%	+15V	0.5A	5A	5%					80W
SBU80-203	+5V	1.2A	12A	5%	+24V	0.3A	3A	5%					80W
SBU80-204	+3.3V	1.2A	12A	7%	+5V	0.5A	5A	5%					64.6W
SBU80-215	+5V	1.2A	12A	5%					-24V	0A	2A	5%	80W
SBU80-300	+3.3V	1.2A	12A	7%	+12V	0.5A	5A	5%	-12V	0A	0.8A	5%	80W
SBU80-300-1	+3.3V	1.2A	12A	7%	+12V	0.5A	5A	5%	+12V	0A	0.8A	5%	80W
SBU80-301	+5V	1.2A	12A	5%	+12V	0.5A	5A	5%	-5V	0A	0.8A	5%	80W
SBU80-301-1	+5V	1.2A	12A	5%	+12V	0.5A	5A	5%	+5V	0A	0.8A	5%	80W
SBU80-302	+5V	1.2A	12A	5%	+12V	0.5A	5A	5%	-12V	0A	0.8A	5%	80W
SBU80-302-1	+5V	1.2A	12A	5%	+12V	0.5A	5A	5%	+12V	0A	0.8A	5%	80W
SBU80-303	+5V	1.2A	12A	5%	+15V	0.5A	5A	5%	-15V	0A	0.8A	5%	80W
SBU80-303-1	+5V	1.2A	12A	5%	+15V	0.5A	5A	5%	+15V	0A	0.8A	5%	80W
SBU80-304	+5V	1.2A	12A	5%	+24V	0.3A	3A	5%	-24V	0A	0.8A	5%	80W
SBU80-304-1	+5V	1.2A	12A	5%	+24V	0.3A	3A	5%	+24V	0A	0.8A	5%	80W
SBU80-305	+5V	1.2A	12A	5%	+24V	0.3A	3A	5%	-12V	0A	0.8A	5%	80W
SBU80-305-1	+5V	1.2A	12A	5%	+24V	0.3A	3A	5%	+12V	0A	0.8A	5%	80W
SBU80-306	+3.3V	1.2A	12A	7%	+12V	0.5A	5A	5%	-5V	0A	0.8A	5%	80W
SBU80-306-1	+3.3V	1.2A	12A	7%	+12V	0.5A	5A	5%	+5V	0A	0.8A	5%	80W
SBU80-307	+5V	1.2A	12A	5%	+10V	0.5A	5A	5%	-10V	0A	1.0A	5%	80W
SBU80-307-1	+5V	1.2A	12A	5%	+10V	0.5A	5A	5%	+10V	0A	1.0A	5%	80W
SBU80-308	+3.3V	1.2A	12A	7%	+5V	0.5A	5A	5%	-12V	0A	1.0A	5%	76.6W
SBU80-308-1	+3.3V	1.2A	12A	7%	+5V	0.5A	5A	5%	+12V	0A	1.0A	5%	76.6W

### Mechanical Specifications :

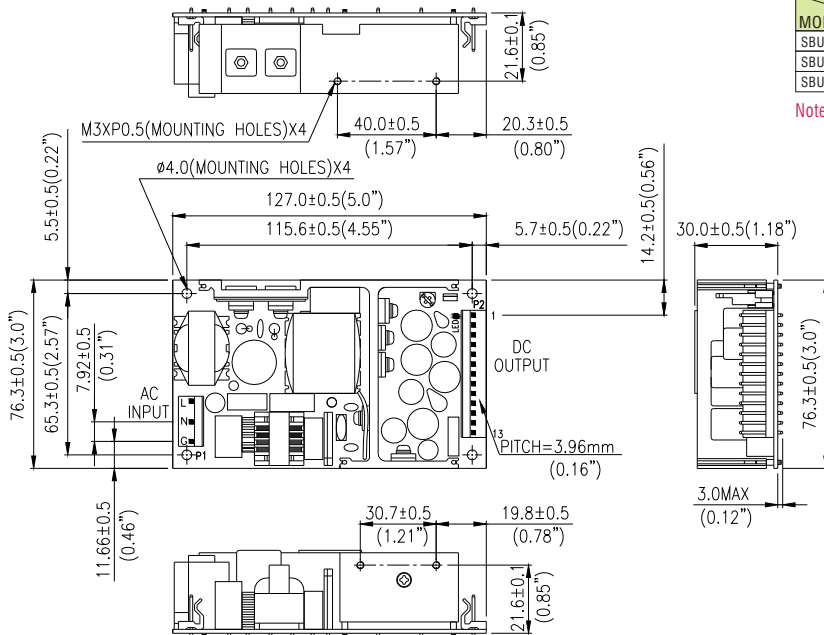

### PIN CHART

MODEL	PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
SBU80-215-13PIN	N/C	N/C	Vo1	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	N/C
SBU80-2XX-13PIN	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	N/C	COM	COM	N/C
SBU80-3XX-13PIN	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	N/C

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3

### Note:

1. Dimensions are shown in inches or mm.
2. Weight: 350gs approx.
3. Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal.